


LAMP[®] AZ-GD232 STAINLESS STEEL SOFT CLOSING FLAP LID SYSTEM FOR INCLINED SURFACE Installation instructions

Thank you for selecting our product. Before starting installation, please read this manual thoroughly to ensure correct installation. Please keep this manual at hand for future reference.

About the product

- Damper allows silent closing of lid.
- Suitable for vertical surface to inclined surface of 45 degree.
- Side plates for anti-pinch function.

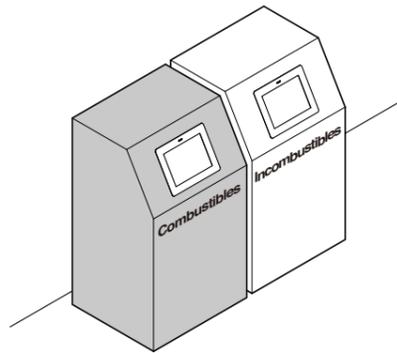

For your safety work and operation

- ⊘ This symbol denotes prohibited actions.
- ⓘ This symbol denotes what must be done.

CAUTION If these cautions are not followed, it may result in injury or damage.

- ⓘ Make sure to fix the balance weight to the position of corresponding angle of mounting surface. If the place is improper, it may affect the movement of lid, and cause injury.
- ⓘ To avoid any risk of accidental fall and injury, ensure that the AZ-GD232 is securely fastened to the place which has adequate strength.
- ⊘ Any attempt to dismantle, modify or use in any way other than that indicated below, may result in damage or injury.
- ⓘ Recommended ambient temperature range is 0 to 40 degrees centigrade.
- ⓘ The closing speed of the lid may vary according to ambient temperature. If the product is stored below zero degree, please use it after several hours of storage in normal room temperature.


Parts description

Description	Quantity
Flap lid body	1
Warning sticker	1
Cover cap	4


Tools needed for installation

- Screws (not provided)
Choose the suitable length according to the material to be mounted.
Recommended screw : Tapping screw Nominal 3 4 pcs

Dimension drawing

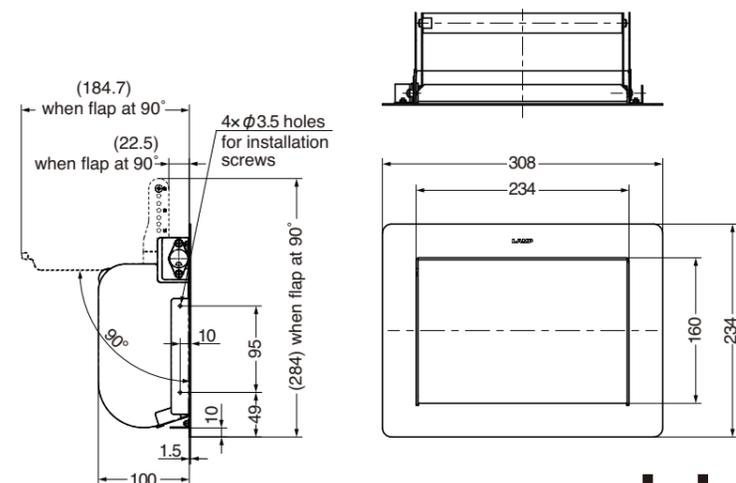


Cutout dimensions

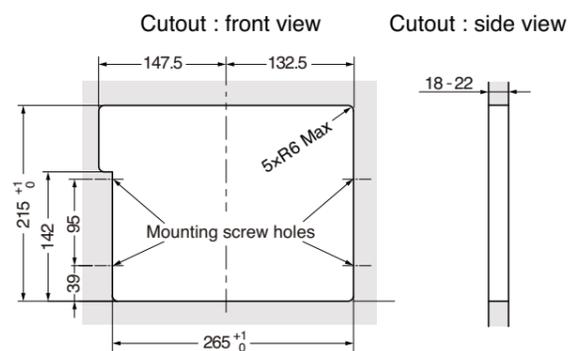

Installation procedure


1

Make sure that the LAMP logo is at the top.

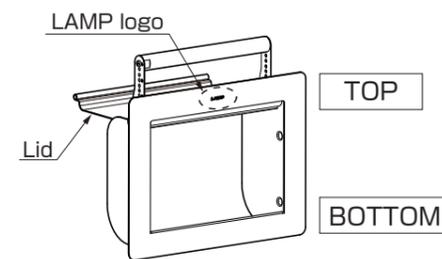

2


Position the balance weight according to the angle of mounting surface. (The factory setting is 45 degree.)

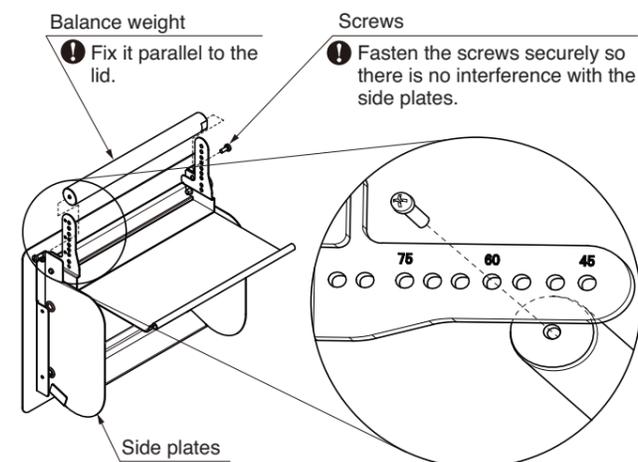

- ⊘ Fix it parallel to the lid.
 - ⓘ Fasten the screws securely so there is no interference with the side plates.
- ⊘ Unscrew the balance weight and re-fix it to the place which corresponds to the angle of mounting surface.
⊘ If the lid closes too fast or does not close fully, re-position the balance weight.


3

Do not leave any gap between the flap lid body and the mounting surface.

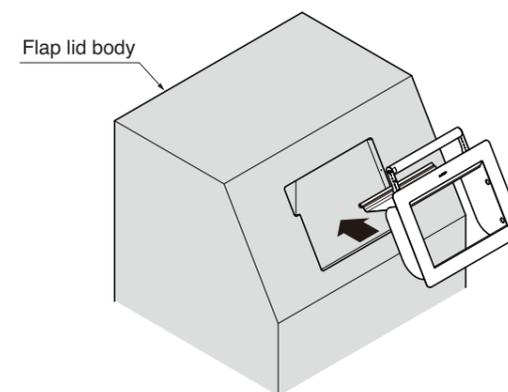

4

- ⊘ Having opened the lid, insert the screws through the provided access screw holes (2 on each side) and fasten the flap lid body securely.
- ⊘ Make sure that the final assembly is securely fastened.

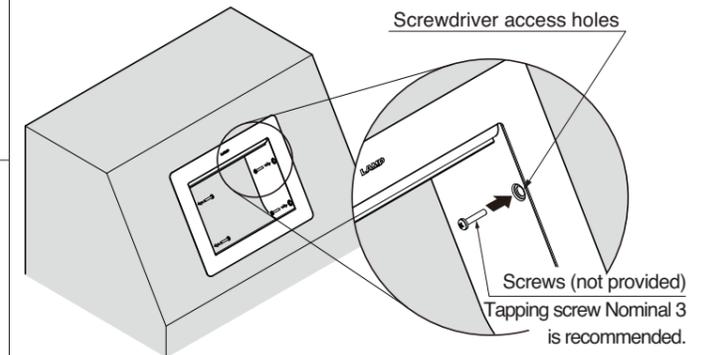


5

Slowly open and close the lid completely a few times in order to make sure that there are no obstacles such as the bottom edge of the cutout or any item inside.

6

Cover the screwdriver access holes with the caps provided.

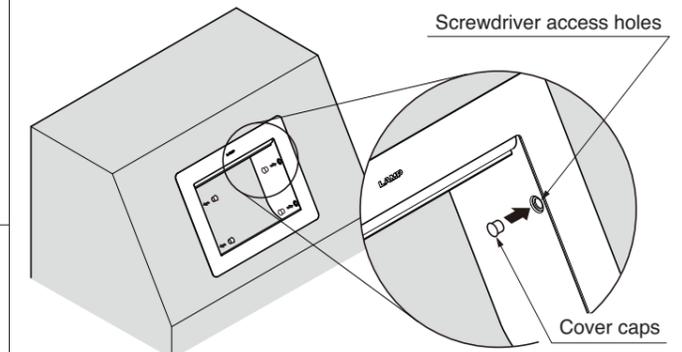

7

Paste the warning sticker in a visible position to avoid any injury when using the AZ-GD232.

Hand or finger
may
get caught.

手ばさみに
ご注意ください



SUGATSUNE KOGYO CO.,LTD.
Phone: +81 3 3866 2260
F a x : +81 3 3866 4447
E-mail: export@sugatsune.co.jp
Website: www.sugatsune-intl.com

SUGATSUNE KOGYO (UK) LTD.
Phone: +44 118 9272 955
F a x : +44 118 9272 871
E-mail: sales@sugatsune.co.uk
Website: www.sugatsune.co.uk

SUGATSUNE AMERICA, INC.
Phone: +1 310 329 6373
F a x : +1 310 329 0819
E-mail: sales@sugatsune.com
Website: www.sugatsune.com

SUGATSUNE SHANGHAI CO., LTD.
Phone: +86 21 3632 1858
F a x : +86 21 3632 1868
E-mail: lamp@sugatsune.com.cn
Website: www.sugatsune.com.cn